



# Washer Extra Dry WASCOMAT WED SERIES

Combining world-class reliability with innovative features and programmability, **Wascomat washers are designed to work as a system with Wascomat dryers.** The washer initiates the drying process which means, the higher the G-force, the more water is extracted from the laundry. This speeds up the drying process, saving energy, time, and money.

## Wascomat WED Washers continue a long tradition of excellence in technology, design, and quality.

- Automatic Savings (AS) determines the exact load weight and adds precisely the right amount of water for significant savings
- Compass Pro lets you control important functions such as exact water levels, wash times and number of rinses – with a simple turn of the dial
- Robust door handle – durable in any environment
- Door unlocks immediately at the end of final cycle – no delays
- Unique 4-compartment supply dispenser
- Extended machine life with Super Balance
- Sanitizing Rinse generates customer loyalty, gives customers peace of mind
- Text messaging and voice guidance features (optional)
- Innovative LaundryPulse and LaundryPay (optional)
- Interchangeable parts from one machine size to another

## Features and Benefits

**Wascomat Compass Pro provides the ultimate in flexibility:**

- Create fully customized wash programs to lower costs and meet customer demands for your specific market
- Cycle upgrade options increase store revenue and boost customer satisfaction
- Display wash program information in multiple languages
- Real-time clock for happy hour, promotional pricing

## Eco-Friendly Solutions

Wascomat products are engineered for quality, energy savings, and water efficiency. When you buy Wascomat, you are truly investing in the future of your business.

## Latest Styling

Choose from standard white or **NEW shiny stainless steel front panels.** New upgraded, scratch- and stain-resistant stainless steel.

## Perfect Fit


Most sizes available in 220 or 120 volt, single phase. Now it's easy to replace old, inefficient top-load or front-load washers with new Wascomat equipment.

## LaundryPay Transforms the Laundry Experience for Your Customers

Attract new customers and build loyalty by providing the most convenient laundry service available. With our LaundryPay App, your customers can pay through their smartphone, view machine availability, and receive a notification when their wash cycle is complete.

## Ultimate Control with LaundryPulse

Remotely monitor, manage, and control your business – from anywhere at any time with Laundry Pulse. Get instant service alerts, performance data, real-time revenue and utilization reports, diagnostic info, and more delivered right to your phone. You can even remotely adjust pricing and create promotional campaigns to generate business on slower days.

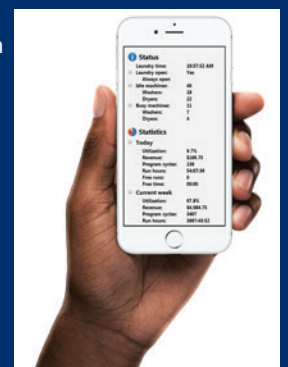

| Wascomat "WED" Series Washers  | WED720             |             | WED725             |           | WED730             |             | WED745             |           | WED762             |             | WED777             |             |
|--|--------------------|-------------|--------------------|-----------|--------------------|-------------|--------------------|-----------|--------------------|-------------|--------------------|-------------|
| Capacity (lb/kg)   | 20                 | 9           | 25                 | 11        | 30                 | 14          | 45                 | 20        | 62                 | 28          | 77                 | 35          |
| Width (in/mm)  | 26                 | 660         | 28 3/8             | 720       | 28 3/8             | 720         | 29 1/2             | 750       | 32 11/16           | 830         | 35 13/16           | 910         |
| Depth (overall) (in/mm)  | 28 7/16            | 722         | 27 7/16            | 697       | 31                 | 787         | 36                 | 914       | 40 1/2             | 1029        | 43 7/8             | 1114        |
| Height (in/mm)   | 44 5/8             | 1133        | 47 15/16           | 1217      | 47 7/8             | 1216        | 52 15/16           | 1345      | 56 1/8             | 1426        | 57 11/16           | 1465        |
| Height to bottom of door (in/mm)   | 14                 | 355         | 14 3/8             | 365       | 14 3/8             | 365         | 17 1/8             | 435       | 18 1/2             | 470         | 19 11/16           | 500         |
| Door opening diameter (in/mm)  | 12 1/4             | 310         | 14 3/8             | 365       | 14 3/8             | 365         | 15 9/16            | 395       | 17 1/8             | 435         | 17 1/8             | 435         |
| Cylinder volume (ft <sup>3</sup> /l)   | 3                  | 85          | 3.7                | 105       | 4.6                | 130         | 6.4                | 180       | 8.8                | 250         | 11.7               | 330         |
| Drain outlet diameter (in/mm)  | 3                  | 75          | 3                  | 75        | 3                  | 75          | 3                  | 75        | 3                  | 75          | 3                  | 75          |
| Height to centerline of drain (in/mm)  | 4 1/16             | 103         | 4 1/16             | 103       | 4 1/16             | 103         | 4 1/16             | 103       | 4 1/16             | 103         | 4 1/16             | 103         |
| Extract (rpm/G-Force)  | 830 / 200          |             | 776 / 200          |           | 776 / 200          |             | 742 / 200          |           | 702 / 200          |             | 641 / 200          |             |
| Dynamic floor load (lb/kN)   | 382 +/- 585        | 1.7 +/- 2.6 | 427 +/- 674        | 1.9 +/- 3 | 517 +/- 854        | 2.3 +/- 3.8 | 674 +/- 1079       | 3 +/- 4.8 | 854 +/- 1326       | 3.8 +/- 5.9 | 967 +/- 1551       | 4.3 +/- 6.9 |
| Dynamic frequency (Hz)   | 13.8               |             | 12.9               |           | 12.9               |             | 12.4               |           | 11.7               |             | 11.2               |             |
| Noise level (dBA) in extraction  | <75                |             | <71                |           | <72                |             | <74                |           | <76                |             | <75                |             |
| Crated width - (in/mm)   | 27 3/16            | 690         | 29 1/2             | 750       | 29 1/2             | 750         | 30 11/16           | 780       | 33 7/8             | 860         | 37                 | 940         |
| Crated depth - (in/mm)   | 32 11/16           | 830         | 35 1/16            | 890       | 37 3/8             | 950         | 39 3/16            | 995       | 43 11/16           | 1110        | 47 1/16            | 1195        |
| Crated height - (in/mm)  | 48                 | 1219        | 53 1/8             | 1350      | 53 1/8             | 1350        | 56 7/16            | 1434      | 61 1/4             | 1556        | 62 7/16            | 1586        |
| Crated weight (lb/kg)  | 276                | 126         | 364                | 166       | 370                | 169         | 522                | 238       | 615                | 280         | 717                | 326         |
| <b>Electrical Requirements (standard)</b>  |                    |             |                    |           |                    |             |                    |           |                    |             |                    |             |
| Voltage/frequency/phase  | 208-240/60/1 or 3- |             | 208-240/60/1 or 3- |           | 208-240/60/1 or 3- |             | 208-240/60/1 or 3- |           | 208-240/60/1 or 3- |             | 208-240/60/1 or 3- |             |
| Power (kW) / Full-load current (A) / Ckt breaker (A)   | 0.5 / 2.4 / 15     |             | 0.7 / 3.4 / 15     |           | 0.8 / 3.9 / 15     |             | 0.9 / 4.3 / 15     |           | 1.1 / 5.3 / 15     |             | 1.2 / 5.8 / 15     |             |
| Voltage/frequency/phase  | 120/60/1           |             | 120/60/1           |           | 120/60/1           |             | 120/60/1           |           | 120/60/1           |             | 120/60/1           |             |
| Power (kW) / Full-load current (A) / Ckt breaker (A)   | 0.6 / 5.0 / 15     |             | 0.8 / 5.8 / 15     |           | 0.9 / 7.5 / 15     |             | 1.0 / 8.3 / 15     |           | 1.2 / 10.0 / 15    |             | 1.3 / 10.8 / 15    |             |
| <b>Water Information</b>   |                    |             |                    |           |                    |             |                    |           |                    |             |                    |             |
| Inlet fittings (* = 3 inlets)  | 3/4                | DN20        | 3/4                | DN20      | 3/4                | DN20        | 3/4*               | DN20*     | 3/4*               | DN20*       | 3/4*               | DN20*       |
| Flow (gpm/lpm @ 45 psi) (each inlet)   | 5                  | 20          | 5                  | 20        | 5                  | 20          | 5                  | 20        | 16                 | 60          | 16                 | 60          |
| Recommended water pressure (psi/ kPa)  | 30-90              | 200-600     | 30-90              | 200-600   | 30-90              | 200-600     | 30-90              | 200-600   | 30-90              | 200-600     | 30-90              | 200-600     |
| Approx Water usage (gal / liters @ full load)  | 10.8               | 41          | 14.3               | 54        | 16.5               | 62          | 23.7               | 90        | 32.7               | 124         | 43.5               | 165         |
| Modified Energy Factor   | 2.1                |             | 2.1                |           | 2.2                |             | 2.3                |           | 2.0                |             | 2.0                |             |
| Water Factor (Gal per cycle/drum volume)   | 4.0                |             | 3.9                |           | 3.9                |             | 4.0                |           | 4.0                |             | 4.0                |             |
| Refer installation and servicing to qualified, licensed personnel. Always read installation and operating manuals and consult local codes before installation. Protect machines with properly rated, common-trip, circuit breakers ONLY. Warranty void if not properly installed. Solid-mount machines require a concrete foundation, and are not suitable for upper-floor or above-basement installations. Contact your Wascomat distributor for more information and for availability of machines for electric services not listed. Specifications subject to change without notice. Wascomat assumes no responsibility for errors or omissions in this information. |                    |             |                    |           |                    |             |                    |           |                    |             |                    |             |

**Contact us today to learn more about  
our new products and technologies.**

#### Front Panel Options



**White**  
Standard



**NEW Shiny Stainless Steel**  
Optional Upgrade

 **LaundryLux**  
Distribution

laundryluxdistribution.com

 **wascomat**

**Laundrylux**

461 DOUGHTY BOULEVARD, INWOOD, NEW YORK 11096-0338